




PODCAST EQUIPMENT BUNDLE

USER MANUAL V.4.0

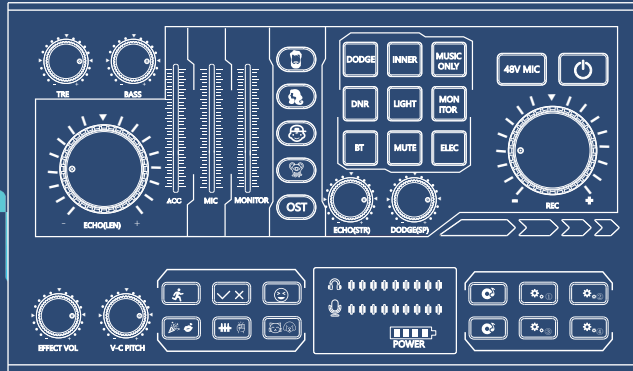

(Model:P9 II)

Catalogue

I.Help-----	1
II.Introduction to Sound Console-----	2
III.Sockets & Charge-----	4
IV.Wireless Connection-----	5
V.Overview of Multi-device Connectivity-----	6
VI.Using on PC -----	10
VII.Connect to Smartphone/Tablet-----	14
VIII. Look for More Official Accessories-----	16

Foreword:

The podcast equipment bundle is designed for live streaming& recording.When connected to the phone or computer, it will become to the external audio input/output device of the phone or computer. You not need to download any drivers or specific applications. You can use it on any audio and video applications/programs.
E.g. YouTube, Tiktok, Twitch, OBS, Audacity...

I.Help

After reading the manual, if you still have confusion, please visit the link to find more help.
The content of the page are constantly updated.



<https://www.hayner-seek.com>

<https://www.facebook.com/haynerseek>




support@hayner-seek.com

sales@hayner-seek.com



II.Introduction to Sound Console

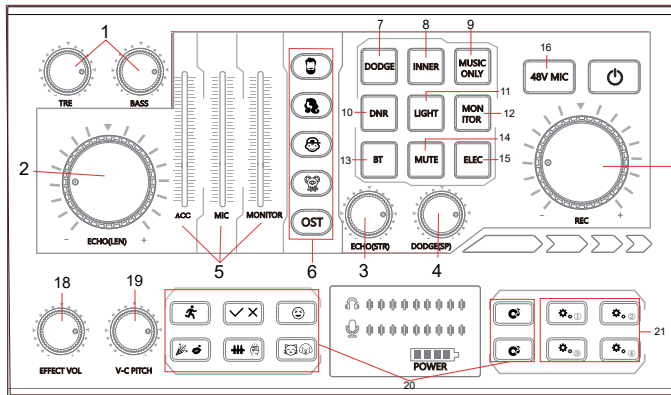


1. **TRE,BASS**: Adjust Treble and Bass.
2. **ECHO(LEN)**: Adjust the length of Echo.
3. **ECHO(STR)**: Adjust the strengthen of Echo.
4. **DODGE(SP)**: Adjust speed of Dodge.
5. **ACC,MIC,MONITOR**: Adjust volume of accompaniment, microphone, monitor(include MONITOR and HEADSET).
6. **MALE,FEMALE,CHILD,MONSTER,OST**: Change your voice to male,female,child and monster. **OST means original sound tape**.OST means original sound tape.
7. **DODGE**: Accompany music volume will automatically become lower when the host talking. And the accompany music will return to normal when the host no talking.
8. **INNER**: On/Off Introversion.When using the PC for live broadcast, gaming or accompaniment, turn on INNER PLAY button, the audience can only hear your voice, nothing else could be heard.Turn off the button, the audience or teammates can hear all the sounds in your computer.
9. **MUSIC ONLY**: Lower (almost eliminated) singer`s voice of the song, Only background music is played.
10. **DNR**: On/Off auto noise reduction function.

11. **LIGHT:** Turn on/off ambient lighting.
12. **MONITOR:** On/Off MONITOR and HEADSET.
13. **BT:** On/Off wireless connectivity (Bluetooth). Turn off "BT", you can only cut off "P9_B", but can not cut off "P9_A".
 1. There are 3 status light of Bluetooth button:
 - a. "Bluetooth" button not light on, Bluetooth function off.
 - b. "Bluetooth" button flash light, Bluetooth function on, but not connected to smartphone.
 - c. "Bluetooth" button light on, Bluetooth function on, and the console was connected to smartphone.
14. **MUTE:** When turn on, the sound input from the microphone and headset can not be listened to, and the sound of accompaniment, special effect sound and live room sound is normal.
15. **ELEC:** Switch the tone of electronic sound. Switch to another mode to turn off the audio mode, for example, press the OST button.
16. **48V MIC:** On/Off 48V phantom power supply.
17. **REC:** Adjust the volume of recording. The knob is used primarily for customizing sound effects.
18. **EFFECT VOL:** Adjust the volume of sound effect
19. **V-C PITCH:** Adjust tone of voice-change
20. *Fixed sound effect area: Every button included 2 sound effects, click the button, play the 1st sound effect, long press the button, play the 2nd sound effect.
21. *Custom sound effect area:
How to add/delete the sound effect (only for the 4 custom buttons)
 - a. Remove sound effect: Quick double click the button to remove the sound effect. When the button light on (keep for about 5 seconds), it indicates that the deletion.
 - b. Add sound effect: Keep press one of custom sound effect button, at the same time playing the music (you can input the music via Bluetooth, USB connected computer) or say something into microphone which you want to leave at the sound effect. Then release the button to end the recording.
 - c. Control the volume: If you found the volume of sound effect is low, you can turn the REC rotary knob to maximum before you adding sound effect. Also, to record the louder music, you can turn up the volume of the music player.
 - d. Check the customized sound effect: Click the button to play the sound effect, If you are not satisfied with the customization, you can repeat above "Deleted" and "Add" working, until you get a satisfaction sound effect. Import Tips: You can add 1 sound effect for each custom button. There are 4 custom buttons on the lower right corner of sound console. Every custom sound effect could be 40 seconds at most, 1 second at least.

III.Sockets & Charge

Legend

-  Input audio
-  Output audio
-  Input/output audio

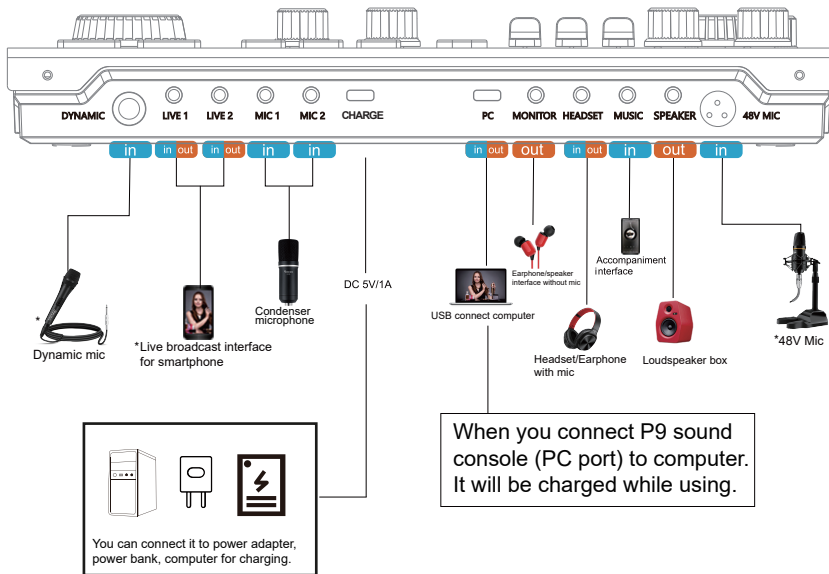

1.If you want to use it on your phone, you need to connected the phone to the LIVE 1 / LIVE 2 port of sound console via audio cable.(audio cable included in package).

2.If you want to use it on PC, you need to connected your PC to the PC port of sound console via USB cable.(USB cable included in package).

⚠️ Important




48V MIC port is used to connect large diaphragm condenser mic which need 48V power supply. You can connect 48V mic to the port directly, not need extra phantom power adapter. This feature is convenient for professional musicians or singers. Package (Model:TC-P903X, HS-AP902X) include 48V microphone. **If you use the 48V microphone ,you need to press "48V MIC" button to turn on the 48V phantom power supply.**

DYNAMIC port is used to connect dynamic microphone. Dynamic mic is a kind of microphone which usually be used at a noisy environment. E.g. ballroom, party hall and Karaoke. We only add the function on the sound console. Package not include dynamic mic.

Charge/PC port, USB Type-C cable for connection. Both ports have charging functions. If the sound card connects to "PC" port, the sound card can be charged at the same time when live streaming or recording. If you want to charge the sound card for preparing, you can connect the "CHARGE" port.

LIVE port is designed for smartphone or tablet(mobile terminal). Please using USB cables to connect PC port with computer, laptop and other devices.

IV. Wireless Connection



1. Open BT on smartphone/tablet.
2. After the BT device "P9_A" or "P9_B" is detected, click "P9_A" or "P9_B" to connect.
3. The wireless function only support to input accompany music.
4. Our sound card has two Bluetooth modules. One Bluetooth module only can be connected to one device at the same time. However ,two Bluetooth modules can respectively work with two devices together. For example ,if phone 1 already connect "P9_A", you can not find "P9_A" in BT list of phone 2, and then , phone 2 can connect "P9_B".

V.Overview of Multi-device Connectivity


Tip:

1. In live broadcast or recording, if the microphone and headphone are used at the same time, the headphone needs to be connected to the "MONITOR". However, if the headphone is connected to the "HEADSET", the sound effect will be terrible.
2. The following usage methods apply to live broadcast and recording.
3. If your phone/tablet do not have a 3.5mm audio port, you need an adapter.


1. For 5V microphone kit (Model: HS-AP901, HS-AP902-2)

① Live & Recording on Computer. Smartphone Accompaniment

To live broadcast on a computer/laptop, you need to connect the "CHARGE" port of the sound console through the USB Type-C charge cable. When the phone is connected wirelessly, accompany music can be played.

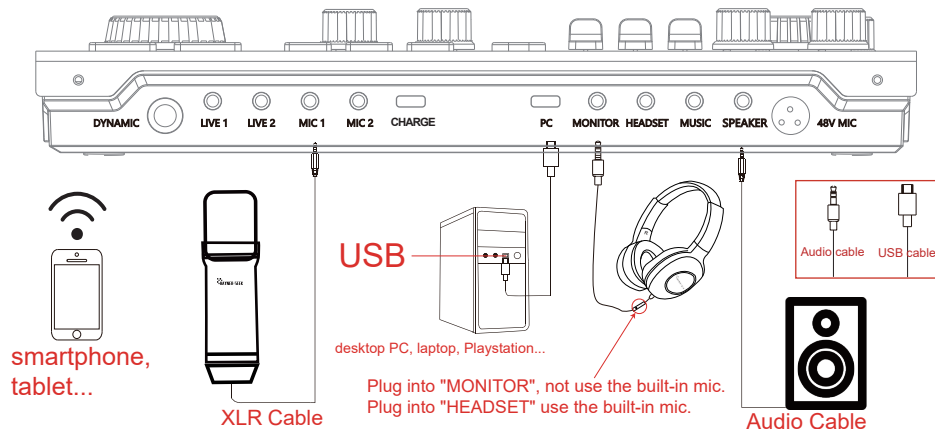


2 Live&Recording on Smartphone

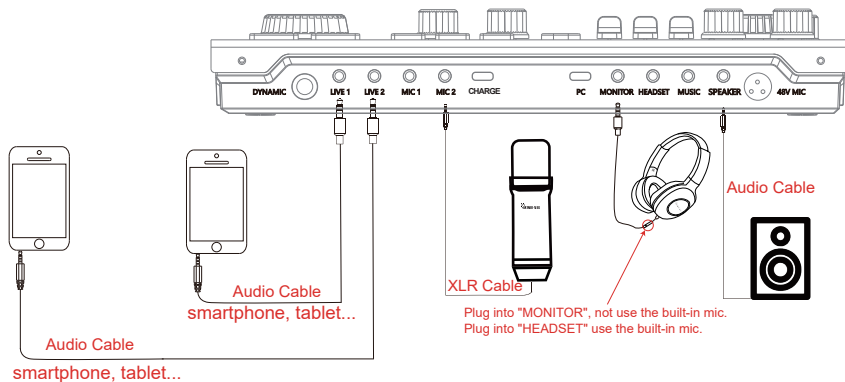

3 Live&Recording on Computer. Accompany Connection(Live/recorded for 2 people)

Note: Live streaming & recording on a computer, first connect the charging port of the USB charging cable. Then the computer will automatically identify and install the drivers for the sound card.

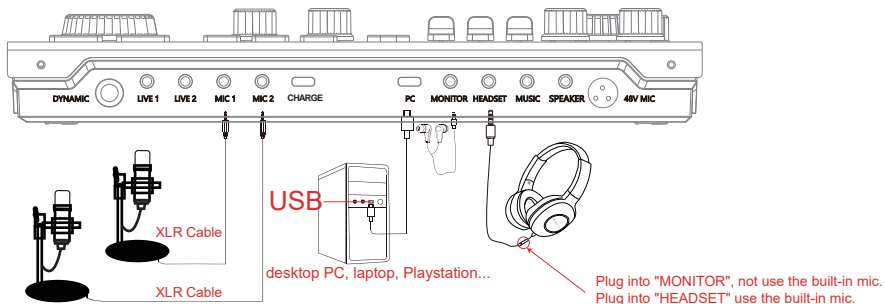


2. For 48V microphone kit (Model: HS-AP902X,TC-P903X)

① 48v Microphone, Live&Recording on Computer


After connecting 48V microphone, you should turn on the “48 MIC” button. Then you can use the 48V microphone.

48V MIC

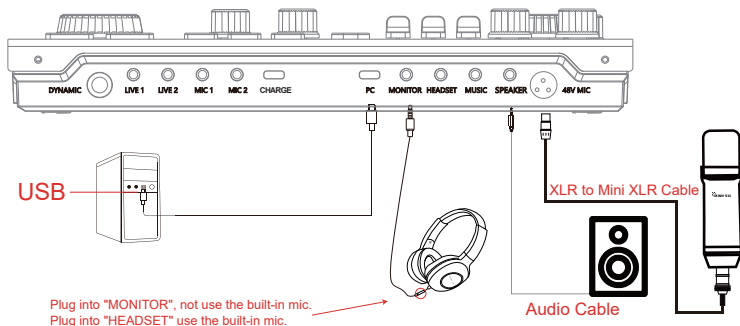


② Live & Recording on Computer. Smartphone Accompaniment

To live broadcast on a computer/laptop, you need to connect the “CHARGE” port of the sound console through the USB Type-C cable. When the phone is connected wirelessly, accompany music can be played.

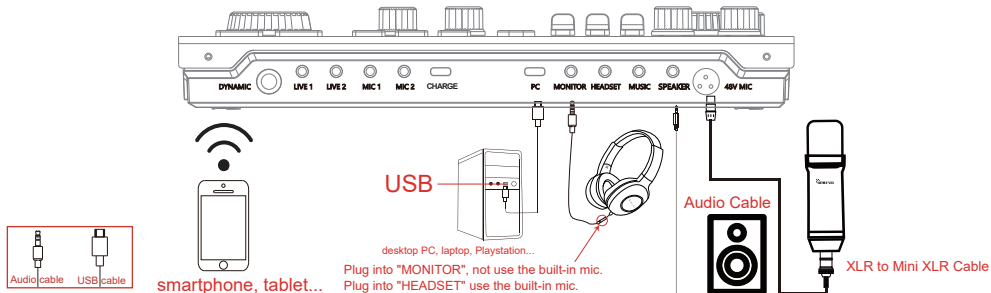

3 Live&Recording on Smartphone

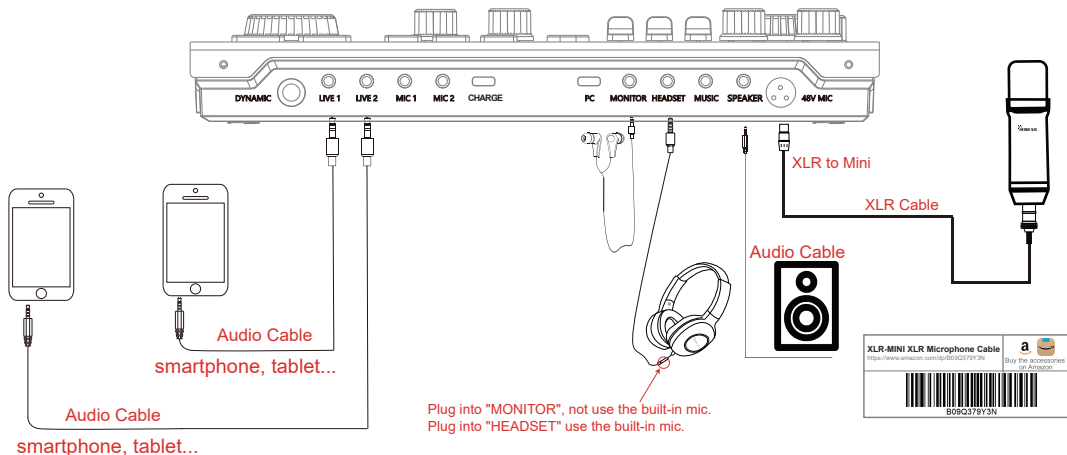

To check if the sound console has been identified and installed by the computer:

- 1.Right-click the speaker icon located at the bottom right corner of the screen then click on "Sounds".
- 2.Click on the "Recording" tab and look for a microphone icon labeled "P9". If you use an adapter or USB hub to the connection, the device name maybe different. You can watch the list change to find out which device is the sound console. If it is displayed and shows as default device, the console has been installed successfully.

Tip:

- a.The console may not work properly or at all if connected to a USB hub. This depends on the functionality of your hub. If this is the case, plug the device directly into the computer.
- b.If the computer does not show the sound console as a default device, you must set the console as default. If you need to exclude other recording or playback devices from a live broadcast on your computer, you must disable all other audio devices, leaving only your sound console.

You can scan the QR code for more help. E.g. download user manual, view guidance video. We also set up a message area, contact after-sales. Please feel free to contact us if you have any questions.



<https://bit.ly/3medKuF>


VI. Using on PC

This bundle can be used on desktop computer, laptop... When it is connected to computer. The bundle will be the external audio input&output device of the computer. You don't need to download any drivers or specific programs for it. You can use it with any record or live software on the computer. E.g. OBS, Audacity, YouTube...



Also, you can use it with Sony Playstation, interactive smart whiteboard... You just need to connect the sound console's PC port to the terminal device. The bundle will be the external audio input&output device of the terminal device.






● Connect to PC



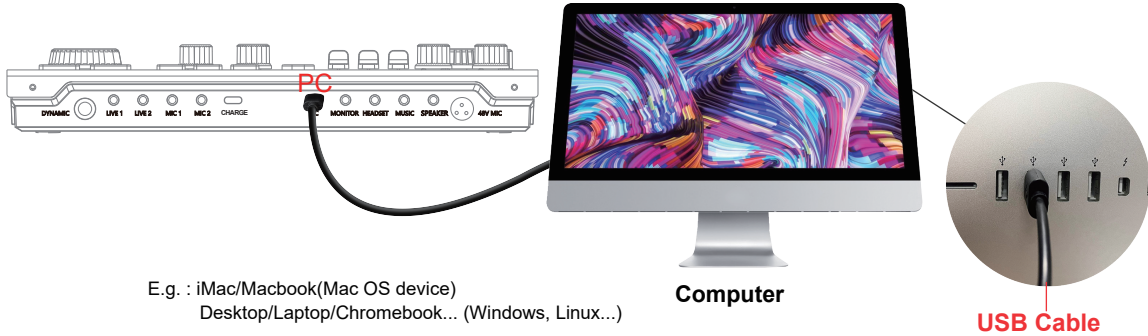




1.Windows 7,8,10

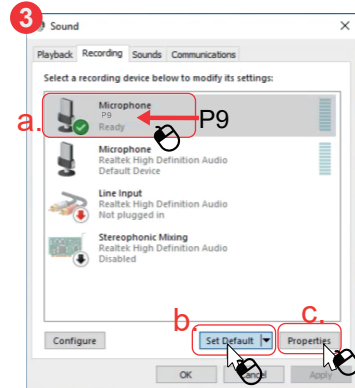

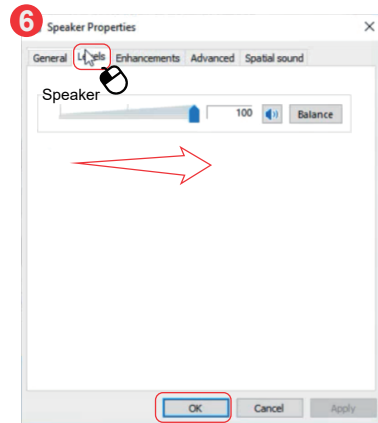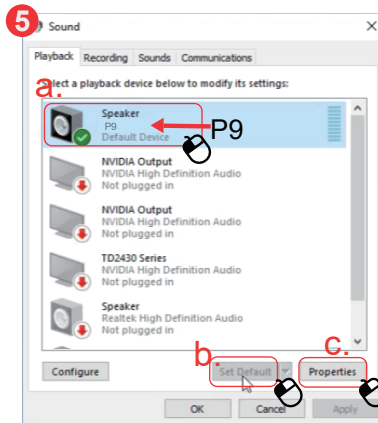
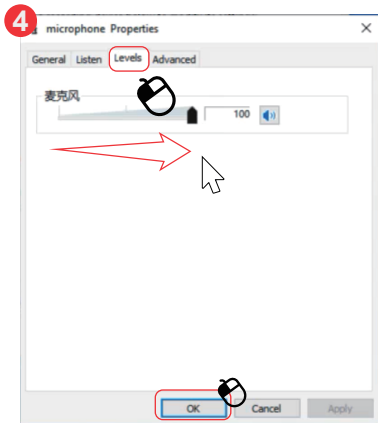




2.Windows 11

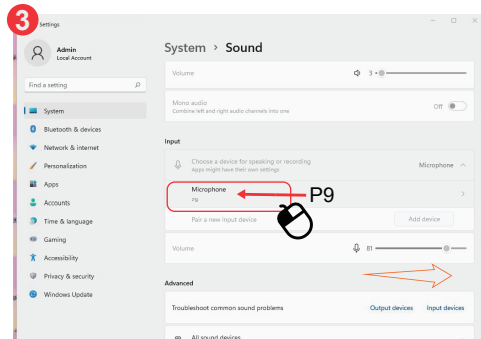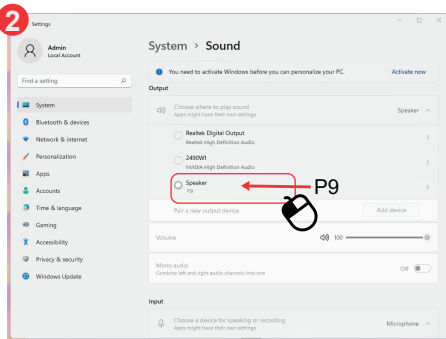

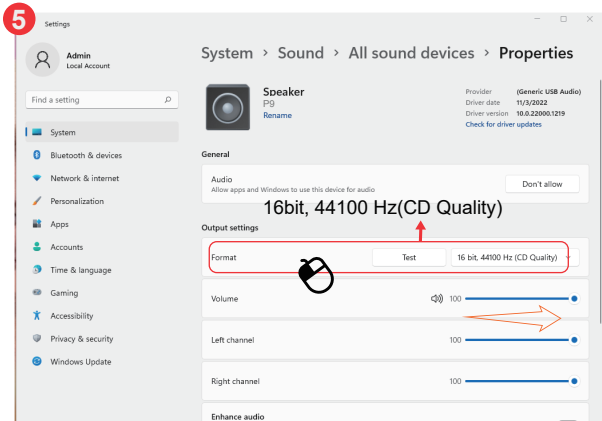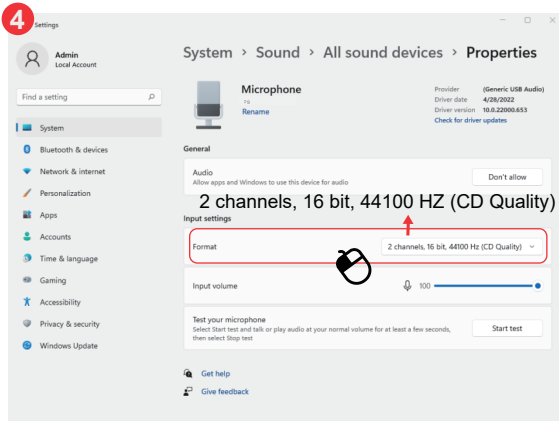


3. Mac OS

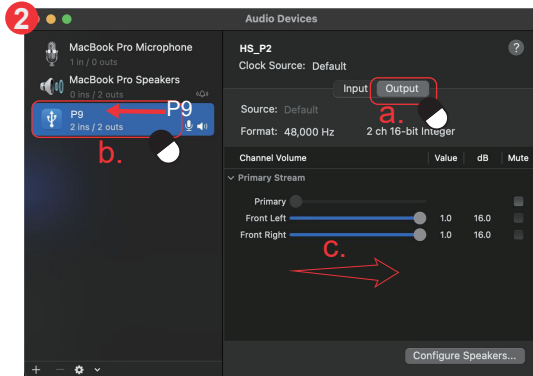

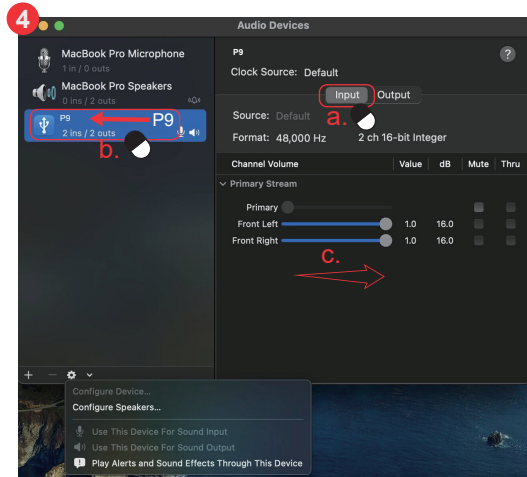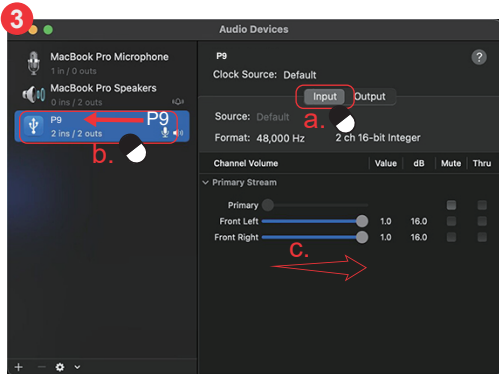

VII. Connect to Smartphone/Tablet


1. Phone/tablet without 3.5mm port

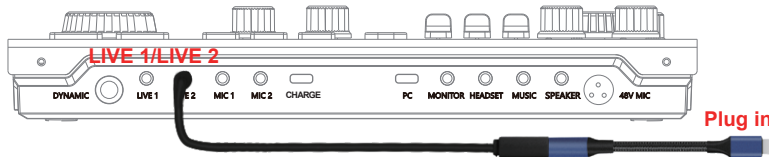

Lightning to 3.5mm adapter
Or
Type-C to 3.5mm adapter



2. Phone/tablet with 3.5mm port

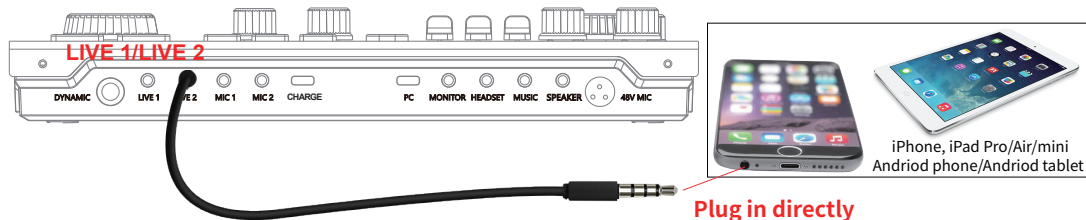

When connected, the bundle will become external audio input/output device of Smartphone/Tablet. Don't need to download any drivers and specific applications. Free drive, plug-n-play.

This podcast equipment kit meets the use of most app, you can use it on live apps: TikToc, YouTube,Bigolive and recorder apps, etc...

For some users who use Apple devices:



From Hayner-Seek



From Apple official store




Non-MFi or fake

1. We need audio input&output-in-one adapter. The adapter that separates the microphone and headphone jack cannot be used.

2. MFi is necessary. Fake or non-MFi Lightning adapter is unusable.

3. That will be unusable if the adapter only supply earphone nonsupport microphone.

For some users who use MacBook series(Include MacBook Air;MacBook;MacBook Pro):

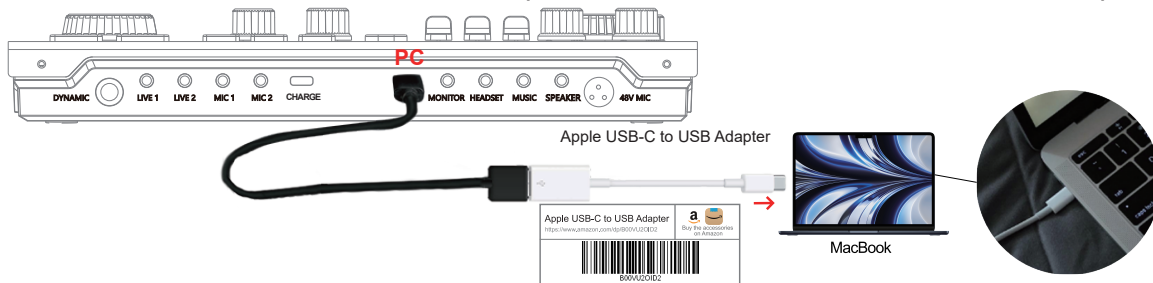

1.The new MacBook series does not have a USB port.To connect podcasts,you need to purchase an Apple USB-C to USB Adapter :<https://a.co/d/3LlaQF5>.

2.You need to purchase this Apple USB-C to USB Adapter from Apple and cannot purchase third-party adapters for lack of compatibility.

VIII. Look for More Official Accessories

👉 For more official accessories, please scan the barcode with Amazon APP.

	<p>Condenser microphone https://www.amazon.com/dp/B097JDDNBH</p> <p>B097JDDNBH</p> <p> Buy the accessories on Amazon</p>
	<p>Condenser microphone https://www.amazon.com/dp/B0878HMYVR</p> <p>B0878HMYVR</p> <p> Buy the accessories on Amazon</p>
	<p>Condenser microphone https://www.amazon.com/dp/B08JVKRC3</p> <p>B08JVKRC3</p> <p> Buy the accessories on Amazon</p>

	<p>Dynamic microphone https://www.amazon.com/dp/B08ZP3RZCB</p> <p>B08ZP3RZCB</p> <p> Buy the accessories on Amazon</p>
	<p>Lightning adapter (not certified) https://www.amazon.com/dp/B086N32HMK</p> <p>B086N32HMK</p> <p> Buy the accessories on Amazon</p>
	<p>Headphone https://www.amazon.com/dp/B09KR725JWW</p> <p>B09KR725JWW</p> <p> Buy the accessories on Amazon</p>



Technical support:



<https://www.hayner-seek.com>

<https://www.facebook.com/haynerseek>



support@hayner-seek.com

sales@hayner-seek.com