HAYNER-SEEK

(Model:P800)

User Manual
V.1.0

Catalogue

Foreword:
The podcast equipment bundle is designed for live streaming& recording.When connected to the phone or computer, it will become to the external audio input/output device of the phone or computer. You not need to download any drivers or specific applications.You can use it on any audio and video applications/programs. E.g. YouTube, Tiktok, Twitch, OBS, Audacity...

I.Help

After reading the manual, if you still have confusion, please visit the link to find more help. The content of the page are constantly updated.
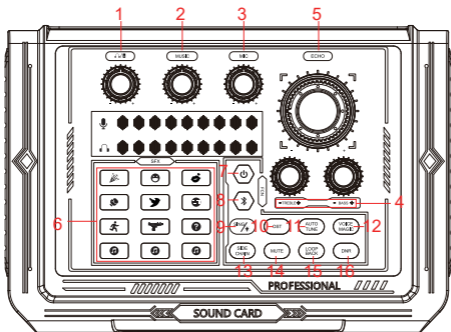
https://www.hayner-seek.com
https://www.facebook.com/haynerseek

support@hayner-seek.com
sales@hayner-seek.com

II.Introduction to Sound Console

1. 🎧/🔊: Adjust the volume of monitor/headset/Speaker.

2. **MUSIC**: Adjust the volume of the accompany music.

3. **MIC**: Adjust the volume of the microphone. （This knob can only control two microphones at the same time, not one of them separately.）

4. **TREBLE/BASS**: Adjust treble and bass of microphone.

5. **ECHO**: Echo volume adjustment.

6. **Sound effect**:(🔇/👃/👆/👋/👉/👐/👟/👣/❷/❼),
Warm-up sound effects can be used in live broadcast and recording to adjust the atmosphere.

7. ⏻ : Power On/Off.

8. ᛒ : On/Off wireless connectivity(Bluetooth).
Bluetooth/function only can be used for input music to sound card.
When Bluetooth is on, but not be connected, the lights are blinking.
Bluetooth can not be used for output audio to other device.

9. SING∕💡 : Singing mode. Backlight button: long press this
button to turn the backlight on/off.

10. **OST**: Switch to the original vocal sound.

11. **AUTO TUNE**: Switch the tone of electronic sound, 10 tones
can be switched.(A,a,B,b,C,D,d,E,e,F,G,g).

12. **VOICE MAGIC**: Voice-changer. Change your voice to male,
female, child and monster.

13. **SIDE CHAIN**: Accompany music volume will automatically
become lower when the host talking. And the accompany music will
return to normal when thw host no talking.

14. **MUTE**: In MUTE mode, your voice can not be recorded.

15. **LOOP BACK**: On/Off Introversion(Inner play) When
using the PC for live broadcast, game or accompaniment,
turn on the LOOP BACK button, the audience or teammates can only
hear your voice(picked up by mic), nothing else could be heard.

16. **DNR**: Digital Noise Reduction. On/Off auto noise reduction function.

III.Sockets & Charge

Legend

in	Input audio
out	Output audio
in out	Input/output audio

Output audio to audience

Output audio to anchor
(include system announcement)

in out   in   in   out   out   in out

PHONE   MIC   MIC   🎧/📱   🎧/📱   💻⚡

Phone/Tablet

Earphone/speaker
interface

PC/Laptop/Desktop

Condenser micophone
interface

Speaker for monitoring
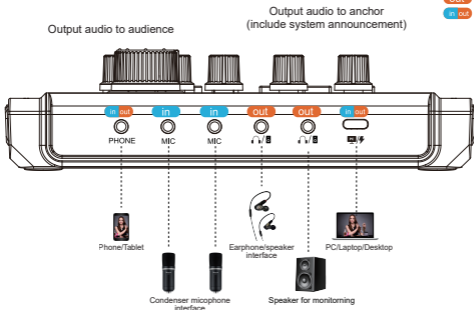
★ The 💻⚡ port of the sound card are connected with the PC via USB-C cable.
★ The PHONE ports of the sound card are connected with the mobile phone via audio cable.

IV.Wireless Connection

BT connection only for supplying accompany music. Not for recording!

Wireless and Network

- 📶 WLAN   open
- 🔵 Bluetooth   open
- 📱 Double SIM Card Settings
- 📞 call settings
- 🔴 Flow usage

← Bluetooth   🔍   ⋮

open   open

Matched equipment

- 💻 HS_P800   ⚙
- 📞 PLK-AL10   ⚙

Available equipment

Bluetooth

ON/OFF

Bluetooth

Open Detection
Only permit devices on search

Name of device   HS_P800

Received files

Matched equipment

🎧 FRJ-F007
Connected

1.Open BT on smartphone/tablet.

2.When the BT device "HS_P800" is detected, click "HS_P800" to connect.

3.The wireless function only support to input accompany music.

4.When the sound console has been connected with wireless, other device will can't find the sound console in their BT list. Please disconnect the previous device when you want to connect it to new device via wireless.
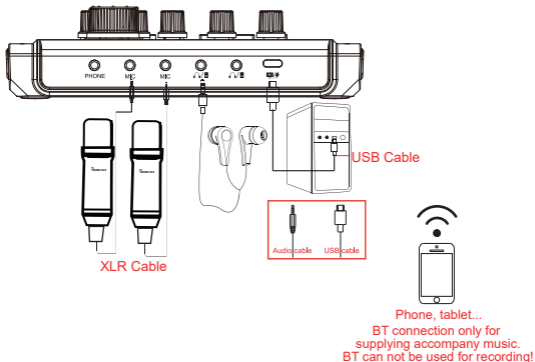
V.Overview of Multi-device Connectivity

1. Single smartphone live connection.

Phone/Tablet

Audio Cable

XLR Cable
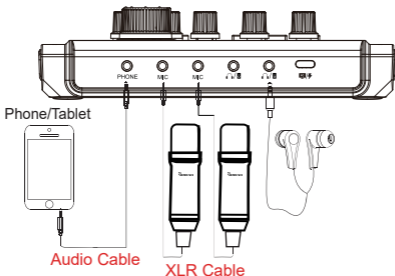
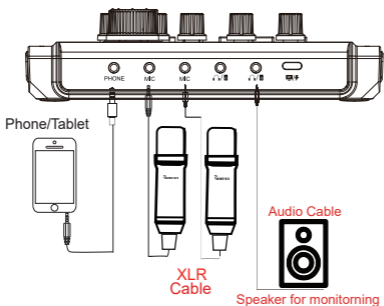## 2. Computer Live & Recording, Smartphone Support Music.

To live broadcast on a computer/laptop,you need to connect the charge port of the sound console through the USB-Type-C charge cable. When the phone is connected wireless, accompany music can be played.

PHONE MIC MIC

USB Cable

Audio cable   USB cable

Phone, tablet...
BT connection only for
supplying accompany music.
BT can not be used for recording!

XLR Cable

3. Phone record/live, speaker monitoring.

PHONE MIC MIC

Phone/Tablet

Audio Cable

XLR
Cable

Speaker for monitroring

Tip: If your phone/tablet do not have a 3.5mm audio port, you need an adapter.Please get the adapter from smartphone brand offical shop.

To check if the sound card has been identified and installed by the computer.

1.Right-click the loudspeaker on the taskbar of the computer, open "Playback device" . If "HS_P800" is displayed and set as the default, it means the sound card has been recognized by the computer and installed successfully.

2.Right-click the loudspeaker on the taskbar of the computer, open "Recording equipment" . If "HS_P800" is displayed and set as the default, it means the sound card microphone has been recognized by the computer and installed successfully.

Tip:

a.The console may not work properly or at all if connected to a USB hub. This depends on the functionality of your hub. If this is the case, plug the device directly into the computer.

b.If the computer does not show the sound console as a default device, you must set the console as default. If you need to exclude other recording or playback devices from a live broadcast on your computer, you must disable all other audio devices, leaving only your sound console.

You can scan the QR code for more help. E.g. download user manual, view guidence video. We also set up a message area, contact after-sales. Please feel free to contact us if you have any questions.

HS-AP803
https://bit.ly/3XpW4dE
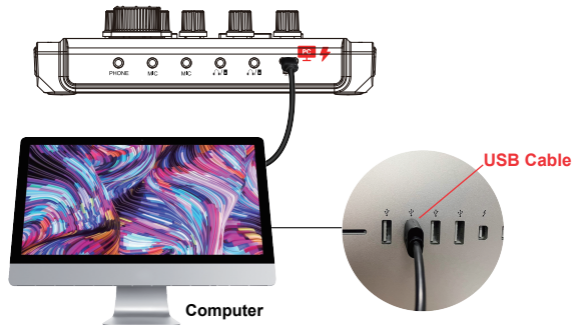
HS-AP803-2
https://bit.ly/3TR2IH6

VI. Using on PC

This bundle can be used on desktop computer, laptop... When it is connected to computer. The bundle will be the external audio input&output device of the computer. You don't need to download any drivers or specific programs for it. You can use it with any record or live software on the computer. E.g. OBS, Audacity, YouTube...

Also, you can use it with Sony Playstation, interactive smart whiteboard... You just need to connect the sound console`s PC port to the terminal device. The bundle will be the external audio input&output device of the terminal device.
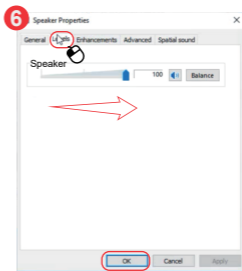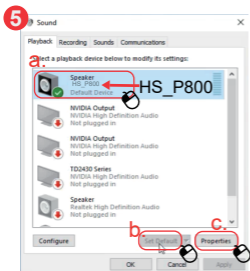

● Connect to PC

Computer

USB Cable

E.g. : iMac/Macbook(Mac OS device)
Desktop/Laptop/Chromebook... (Windows, Linux...)

1. Windows 7,8,10

1

2
Open Volume mixer

Spatial sound (Off)

Sounds

Troubleshoot sound problems

3
Sound

Playback | Recording | Sounds | Communications

Select a recording device below to modify its settings:

a. Microphone
HS_P800
Ready

Microphone
Realtek High Definition Audio
Default Device

Line Input
Realtek High Definition Audio
Not plugged in

Stereophonic Mixing
Realtek High Definition Audio
Disabled

Configure   b Set Default   c. Properties

OK   Cancel   Apply

4
microphone Properties

General | Listen | Levels | Advanced

麦克风

100

OK   Cancel   Apply

5
Sound

Playback | Recording | Sounds | Communications

a. Select a playback device below to modify its settings:

Speaker
HS_P800
Default Device

NVIDIA Output
NVIDIA High Definition Audio
Not plugged in

NVIDIA Output
NVIDIA High Definition Audio
Not plugged in

TD2430 Series
NVIDIA High Definition Audio
Not plugged in

Speaker
Realtek High Definition Audio
Not plugged in

Configure   b Set Default   c. Properties

OK   Cancel   Apply

6
Speaker Properties

General | Levels | Enhancements | Advanced | Spatial sound

Speaker

100   Balance

OK   Cancel   Apply

windows 11

Troubleshoot sound problems

Open volume mixer

b ⚙ Sound settings

a ⚙ ENG 2:27 PM 6/25/2022

Settings

System › Sound

Speaker → HS_P800

Settings

System › Sound

Microphone → HS_P800

4

Settings

Admin
Local Account

Find a setting

System

Bluetooth & devices

Network & internet

Personalization

Apps

Accounts

Time & language

Gaming

Accessibility

Privacy & security

Windows Update

System › Sound › All sound devices › **Properties**

Microphone
HS_P800
Rename

Provider   (Generic USB Audio)
Driver date   4/28/2022
Driver version   10.0.22000.653
Check for driver updates

General

Audio
Allow apps and Windows to use this device for audio   Don't allow

2 channels, 16 bit, 44100 HZ (CD Quality)

Input settings

Format   2 channels, 16 bit, 44100 Hz (CD Quality) ⌄

Input volume   🎤 100

Test your microphone
Select Start test and talk or play audio at your normal volume for at least a few seconds,
then select Stop test   Start test

Get help

Give feedback

5

Settings

Admin
Local Account

Find a setting

System

Bluetooth & devices

Network & internet

Personalization

Apps

Accounts

Time & language

Gaming

Accessibility

Privacy & security

Windows Update

System › Sound › All sound devices › **Properties**

HS_P800
MVSILICON B1
Rename

Provider   (Generic USB Audio)
Driver date   11/3/2022
Driver version   10.0.22000.1219
Check for driver updates

General

Audio
Allow apps and Windows to use this device for audio   Don't allow

16bit, 44100 Hz(CD Quality)

Output settings

Format   Test   16 bit, 44100 Hz (CD Quality) ⌄

Volume   🔊 100
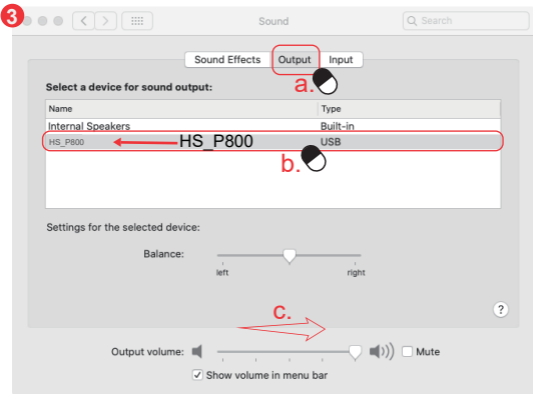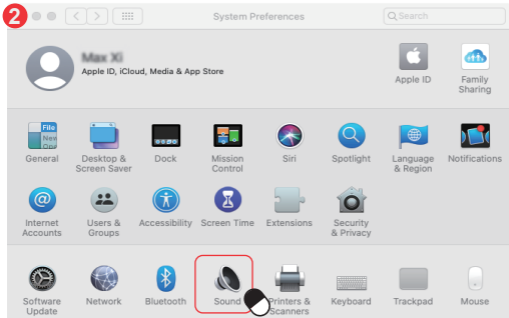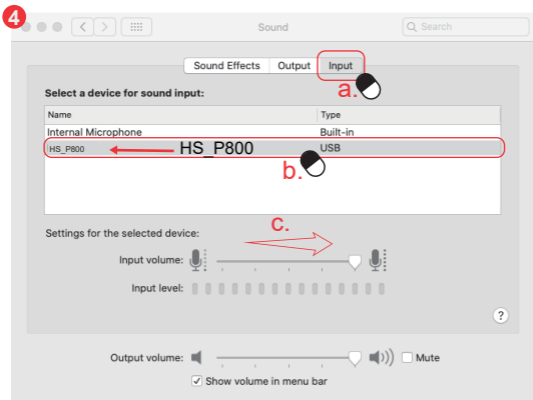
Left channel   100

Right channel   100

Enhance audio
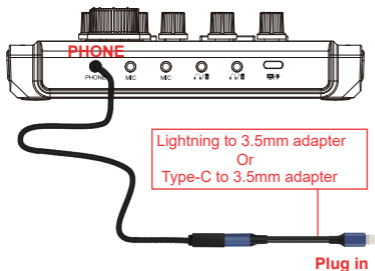Automatically improve sound quality (turn off if you experience sound issues)   Off
Advanced

11

3. Mac OS

System Preferences

Max Xi
Apple ID, iCloud, Media & App Store

| General | Desktop & Screen Saver | Dock | Mission Control | Siri | Spotlight | Language & Region | Notifications |

| Internet Accounts | Users & Groups | Accessibility | Screen Time | Extensions | Security & Privacy |

| Software Update | Network | Bluetooth | Sound | Printers & Scanners | Keyboard | Trackpad | Mouse |

Sound

Sound Effects   Output   Input

a.

Select a device for sound output:

Name	Type
Internal Speakers	Built-in
HS_P800 ← HS_P800	USB

b.

Settings for the selected device:

Balance:
left   right

c.

Output volume: Mute

☑ Show volume in menu bar

④

Sound

Sound Effects | Output | **Input**

a.

Select a device for sound input:

Name	Type
Internal Microphone	Built-in
HS_P800 ← HS_P800	USB

b.

Settings for the selected device:

Input volume: c.

Input level:

Output volume: ☐ Mute

☑ Show volume in menu bar

VII.Connect to Smartphone/Tablet

1. Phone/tablet without 3.5mm port

PHONE

Lightning to 3.5mm adapter
Or
Type-C to 3.5mm adapter

Plug in

iPhone, iPad Pro/Air/mini
Andriod phone/Andriod tablet

Lightning to 3.5mm adapter
http://www.amazon.com/dp/B0B6N32HMK
Buy the accessories on Amazon
B0B6N32HMK

Type-C to 3.5mm adapter
https://www.amazon.com/dp/B07K25P3N1
Buy the accessories on Amazon
B07K25P3N1

13

For some users who use Apple devices:

Non-MFi or fake

1. We need audio input&output-in-one adapter. The adapter that separates the microphone and headphone jack cannot be used.
2. MFi is ncessary. Fake or non-MFi Lightning adapter is unusable.
3. That will be unusable if the adapter only supply earphone nonsupport microphone.

For some users who use MacBook series (Include MacBook Air; MacBook; MacBook Pro):

Apple USB-C to USB Adapter

MacBook

Apple USB-C to USB Adapter
https://www.amazon.com/dp/B00VU2OID2

Buy the accessories
on Amazon

B00VU2OID2
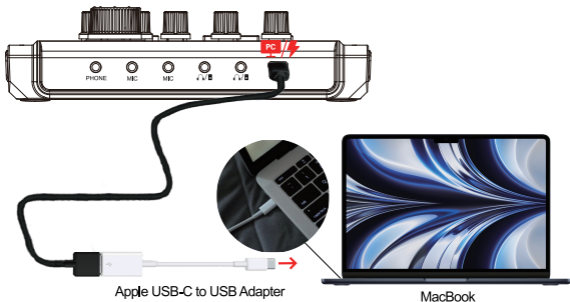
1.The new MacBook series does not have a USB port. To connect podcasts, you need to purchase an Apple USB-C to USB Adapter:https://a.co/d/3LlaQF5.

2.You need to purchase this Apple USB-C to USB Adapter from Apple and cannot purchase third-party adapters for lack of compatibility.

2. Phone/tablet with 3.5mm port

iPhone, iPad Pro/Air/mini
Andriod phone/Andriod tablet

Plug in directly

When connected, the bundle will become external audio input/output device of Smartphone/Tablet. Don't need to download any drivers and specific applications. Free drive, plug-n-play.

This podcast equipment kit meets the use of most app, you can use it on live apps: TikTok, YouTube,Bigolive and recorder apps, etc...

VIII. Look for more official accessories

👆 **For more official accessories, please scan the barcode with Amazon APP.**

	Condenser microphone https://www.amazon.com/dp/B097JDDNBH Buy the accessories on Amazon B097JDDNBH
	Condenser microphone https://www.amazon.com/dp/B0B7BHMYVR Buy the accessories on Amazon B0B7BHMYVR
	Headphone https://www.amazon.com/dp/B09KR725WW Buy the accessories on Amazon B09KR725WW
	Headphone https://www.amazon.com/dp/B09STBTYGP Buy the accessories on Amazon B09STBTYGP
	Lightning adapter (MFi authenticated) https://www.amazon.com/dp/B0B6N32HMK Buy the accessories on Amazon B0B6N32HMK
	Boom arm set https://www.amazon.com/dp/B08YRBRPLY Buy the accessories on Amazon B08YRBRPLY

HAYNER-SEEK

Technical support:

https://www.hayner-seek.com
https://www.facebook.com/haynerseek

support@hayner-seek.com
sales@hayner-seek.com

CE FC ⌀ ☂ ♻ ♻

MADE IN CHINA